
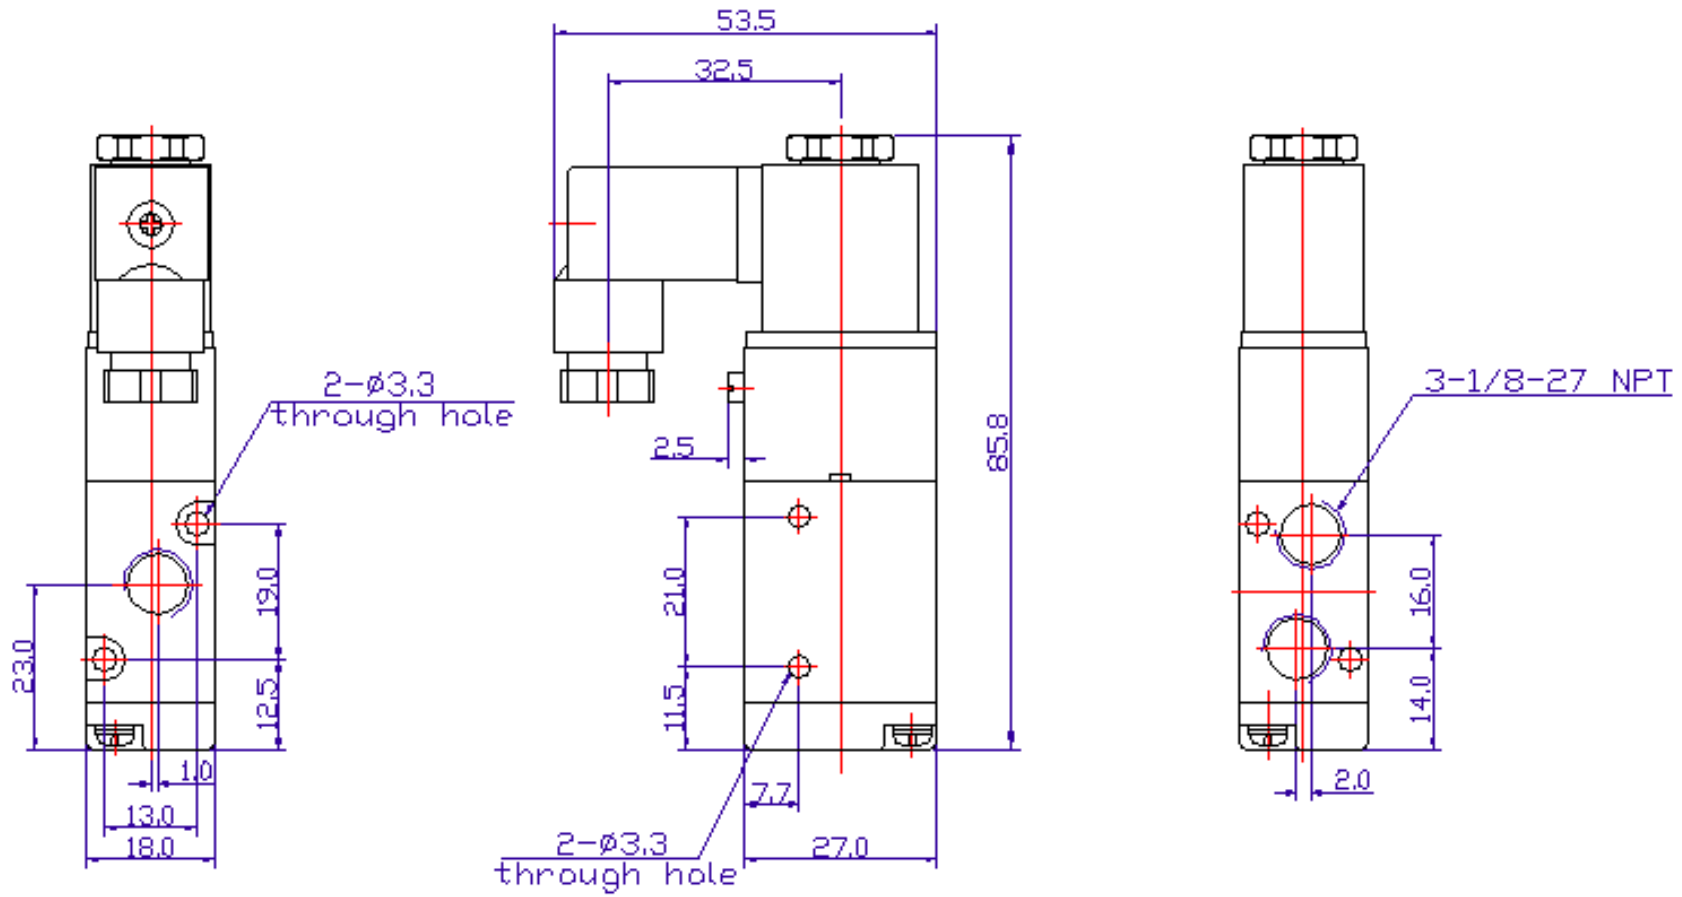


Solenoid Valve: 3V110-410 Series Dimensions (UNIT=MM)

Part No.	Unit Price	Valve Picture	Port Size (NPT)	Voltage Options	Electrical Connection	Port No/ Position/Solenoid	Cv Flow Rate	Response Time	Power Consumption
3V110-1/8	\$25.47		1/8 NPT	1=12VDC 2=24VDC 2A=24VAC 3=110VAC 4=220VAC (50/60Hz)	G=Grommet D= DIN (with LED indicator)	3/2/1 Three Way Valve	0.67	< 20 ms	2.5 W
3V210-1/4	\$25.47		1/4" Inlet & Outlet 1/8" Exhaust		G=Grommet D= DIN (with LED indicator)	3/2/1 Three Way Valve	0.89	< 20 ms	3-4.8 W
3V310-3/8	\$34.30		3/8" Inlet & Outlet 1/4" Exhaust		G=Grommet D= DIN (with LED indicator)	3/2/1 Three Way Valve	1.68	< 20 ms	3-4.8 W
3V410-1/2	\$59.78		1/2 NPT		G=Grommet D= DIN (with LED indicator)	3/2/1 Three Way Valve	2.79	< 20 ms	3-4.8 W

MODEL: 3V110-1/8



TYPE:3V210-1/4

